



REQUEST FOR QUOTATION Amendment #1 Monday March 09, 2026 - FINAL

RFQ Name: Replacement of Post and Rail Fencing at Regional Parks

RFQ NUMBER: RFQ-26003

DATE ISSUED: February 19, 2026

CLOSING DATE: March 12, 2026, 1 PM (PST)

1. Is there a CSA standard for the posts?

The posts should be pressure treated 6x6 posts rated for ground contact (UC4A).

2. Are you open to round posts instead of square?

No. Our standard is square.

3. Do the posts need to be 6" x 6" or can they be 5.5" x 5.5". Do they need to be rough or smooth?

6" x 6" rough cut pressure treated rated for ground contact (UC4A)

4. What should be done with the auger spoils?

Raked around the post and covering the top of the auger hole to hide the crusher dust.

5. Is there concrete on any of the existing posts which are to be removed?

No.

6. Are there any machine restrictions?

The spaces are all accessible for machines.

7. What are the tops of the posts which are beveled to be treated with?

A product such as Cut-N-Seal in brown to match the post or a direct comparative rated for above ground applications.

8. What is the spec of the material to anchor the posts?

Crusher dust (3/8 minus).

9. What is the length of the vehicle gate?

Refer to the maps as each vehicle gate have different dimensions.


10. What is the height of the entry points?

Entry points will be the same as the standard (36 inches). Vehicle gates as labeled on the maps will be 60 inches to allow for signage.

11. What precautions should be taken around tree roots?

This is a replacement of what is existing with some minor straitening in some cases where it has been repaired. There should not be trees that interfere with the project.

12. Can you clarify the expectations for the corner finishing?

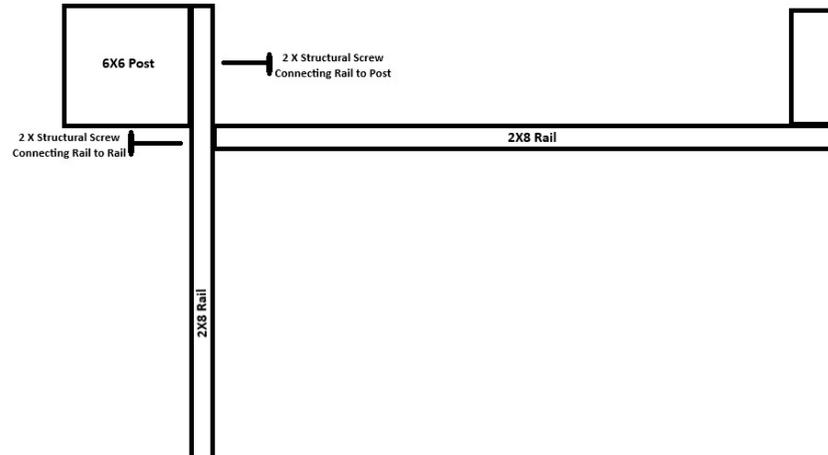

13. What is the expectation for signage and public safety?

Work area cordoned off with cones and tape to prevent pedestrians parking or entering.

14. Can you provide photo examples of what you are expecting?





15. Can you provide a photo or a sketch of the vehicle gate posts?

As per the RFQ, vehicle gate posts are to be 60 inches high with 1/2 inch x 10-inch zinc plated eye bolts installed at 36 inches and connected by 5/16 chain link.

